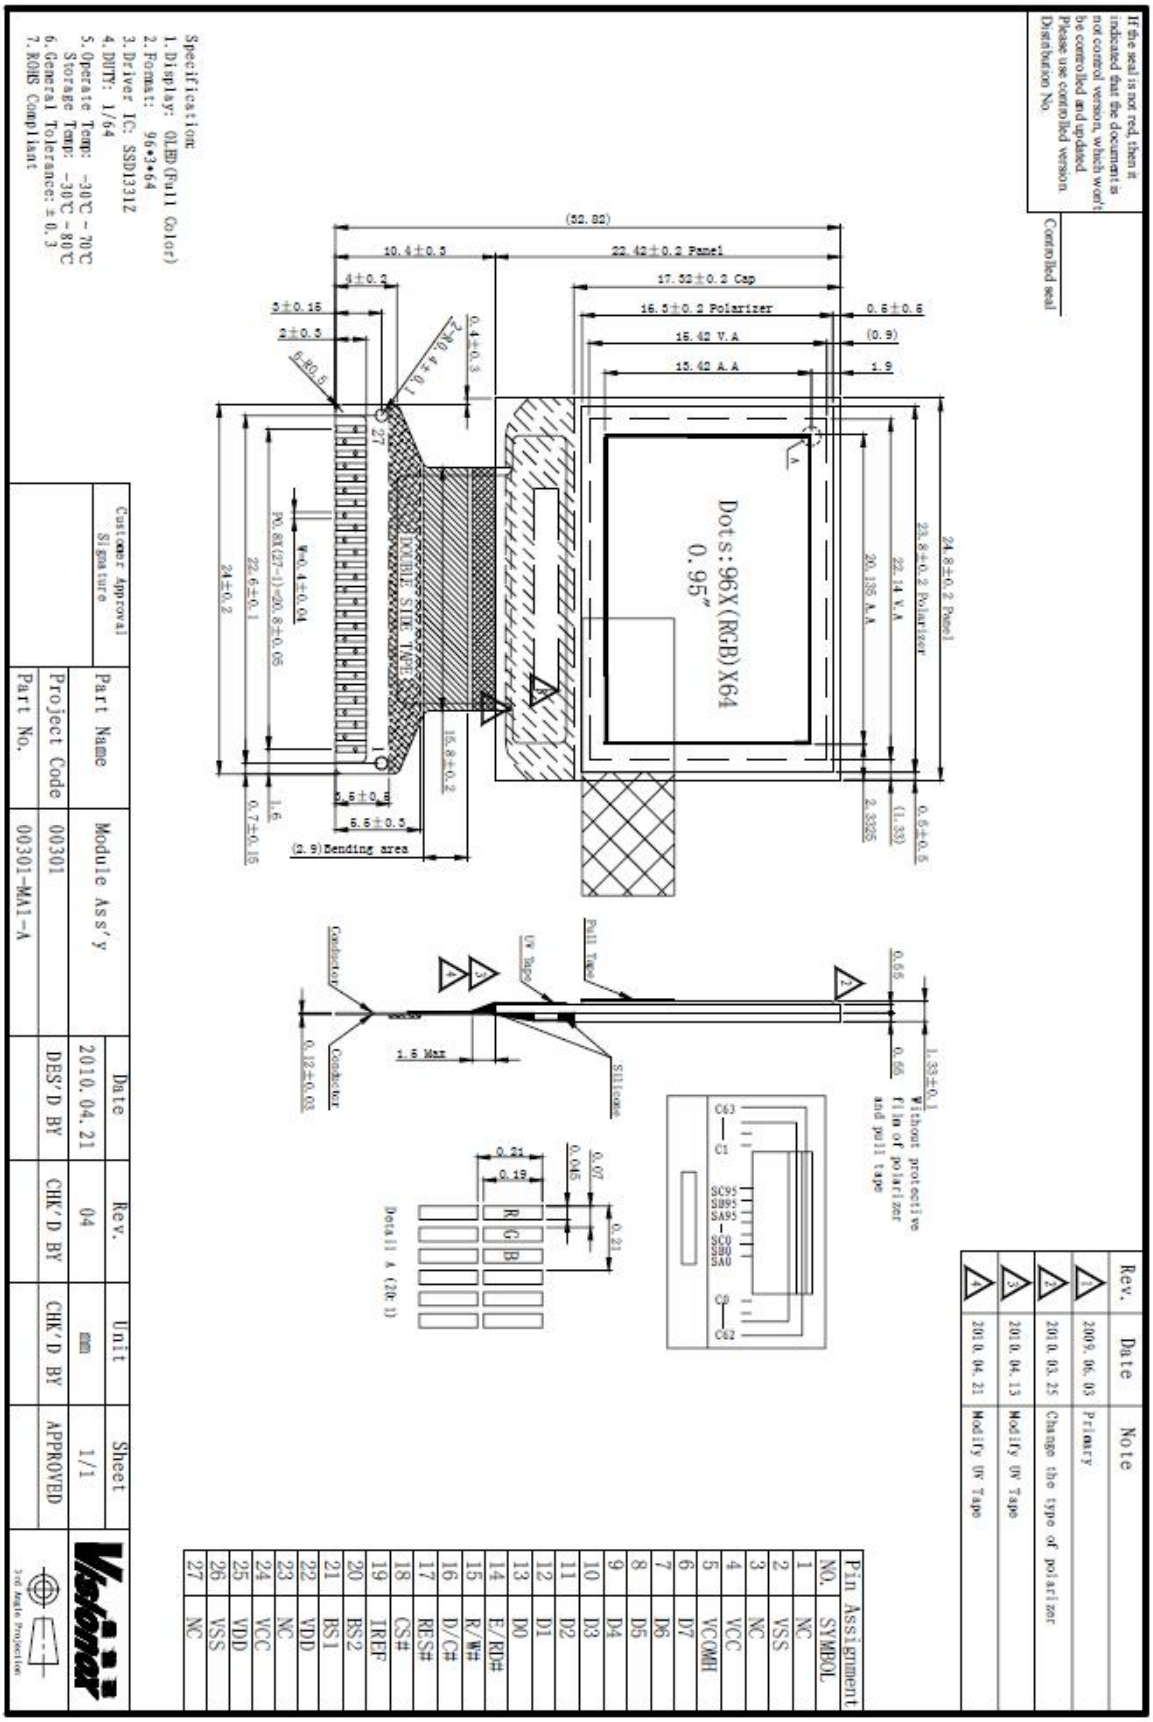
If the seal is not red, then it indicated that the document is not control version, which won't be controlled and updated. Please use controlled version. Distribution No.
Controlled seal
Specification:
1. Display: OLED(Full Color)
2. Format: 96*3*64
3. Driver IC: SSD1331Z
4. DUTY: 1/64
5. Operate Temp: -30℃ ~ 70℃
Storage Temp: -30℃ ~ 80℃
6. General Tolerance: ± 0.3
7. ROHS Compliant
Dots:96X(RGB)X64
0.95"
DOUBLE SIDE TAPE
(2.9)Bending area
Without protective film of polarizer and pull tape
Pull Tape
UV Tape
Silicone
Conductor
Detail A (2:1)
Customer Approval Signature
Part Name
Module Ass'y
Project Code
00301
Part No.
00301-MA1-A
Date
2010.04.21
Rev.
04
Unit
mm
Sheet
1/1
DES'D BY
CHK'D BY
APPROVED
Rev.
Date
Note
2009.06.03
Primary
2010.03.25
Change the type of polarizer
2010.04.13
Modify UV Tape
2010.04.21
Modify UV Tape
Pin Assignment
NO. SYMBOL
1 NC
2 VSS
3 NC
4 VCC
5 VCOMH
6 D7
7 D6
8 D5
9 D4
10 D3
11 D2
12 D1
13 D0
14 E/RD#
15 R/W#
16 D/C#
17 RES#
18 CS#
19 IREF
20 BS2
21 BS1
22 VDD
23 NC
24 VCC
25 VDD
26 VSS
27 NC