





LCD
MIKROELEKTRONIK

YTS350ELAK-02-401N

Date

08.06.2016

LCD-Mikroelektronik Dr.
Hampel & Co. GmbH
Griesbachstr. 7
76185 Karlsruhe
+49 (0) 721 / 98 47 80

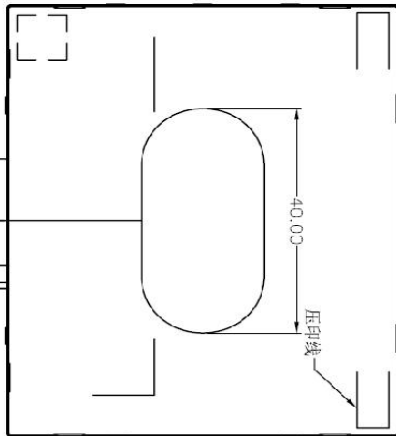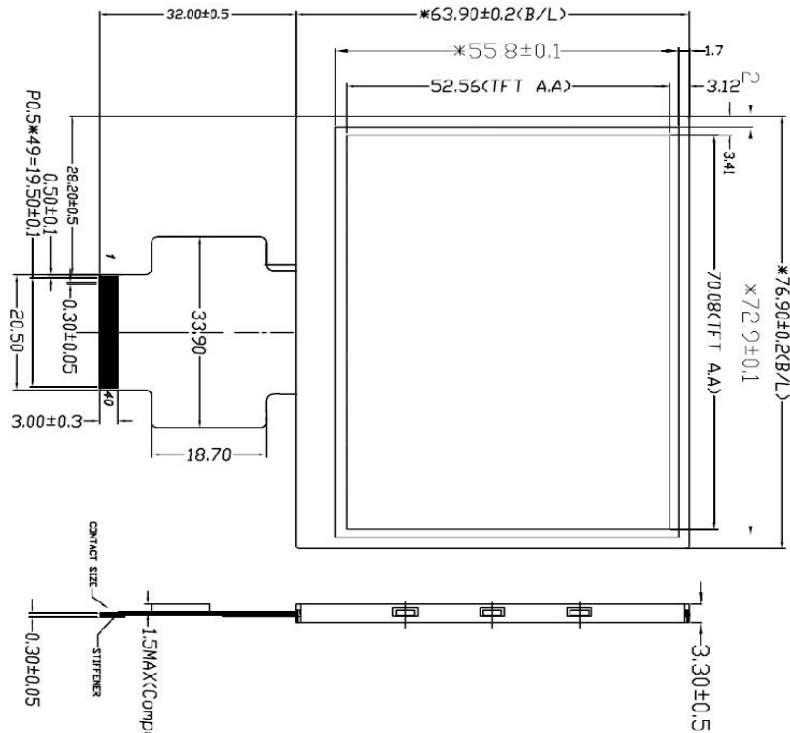

PIN	SYMBOL	PIN	SYMBOL
1	K	21	B0
2	A	22	B1
3	GND	23	B2
4	VCC	24	B3
5	R0	25	B4
6	R1	26	B5
7	R2	27	B6
8	R3	28	B7
9	R4	29	GND
10	R5	30	DOTCLK
11	R6	31	DISPLAY
12	R7	32	HSYNC
13	G0	33	VSYNC
14	G1	34	ENABLE
15	G2	35	NC
16	G3	36	GND
17	G4	37	NC
18	G5	38	NC
19	G6	39	NC
20	G7	40	NC

1	Operating Voltage:	Vcc=3.3V typ.
2	Resolution:	320RGB*240
3	Color:	16M
4	Interface:	24-bits RGB
5	Display type:	Transmissive
6	Viewing Direction:	12:00
7	Operating Temp.:	-20°C~70°C
8	Storage Temp.:	-30°C~80°C
9	Driver IC:	HXB23B-D
10	Unspecified tolerance:	±0.3