




**LCD**  
MIKROELEKTRONIK

# YTSA10WLAI-02-100C


Date

08.06.2016

LCD-Mikroelektronik Dr.  
Hampel & Co. GmbH  
Griesbachstr. 7  
76185 Karlsruhe  
**+49 (0) 721 / 98 47 80**

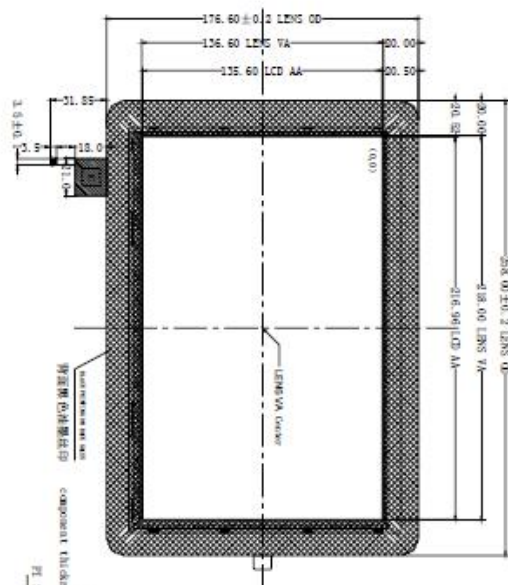

TOP VIEW

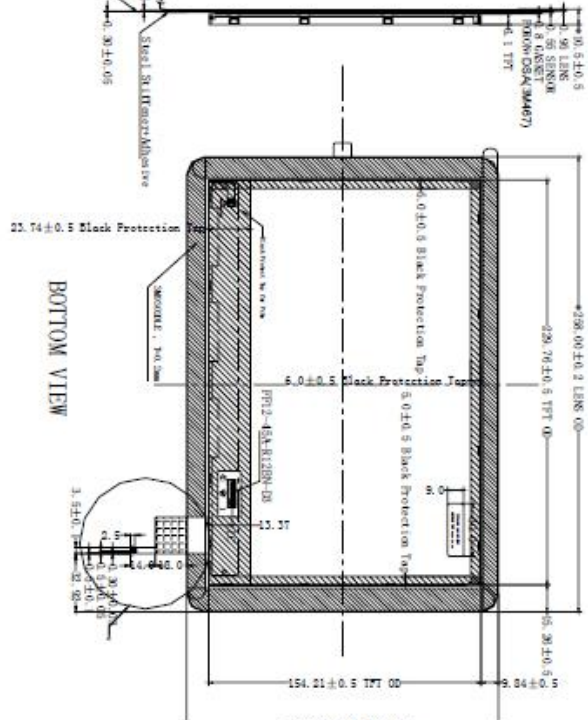

BOTTOM VIEW

TP7 PIN TABLE

TP1	SENSE
2	SENSE
3	SENSE
4	SENSE
5	SENSE
6	SENSE
7	SENSE
8	SENSE
9	SENSE
10	SENSE
11	SENSE
12	SENSE
13	SENSE
14	SENSE
15	SENSE
16	SENSE
17	SENSE
18	SENSE
19	SENSE
20	SENSE
21	SENSE
22	SENSE
23	SENSE
24	SENSE
25	SENSE
26	SENSE
27	SENSE
28	SENSE
29	SENSE
30	SENSE
31	SENSE
32	SENSE
33	SENSE
34	SENSE
35	SENSE
36	SENSE
37	SENSE
38	SENSE
39	SENSE
40	SENSE
41	SENSE
42	SENSE
43	SENSE
44	SENSE
45	SENSE
46	SENSE
47	SENSE
48	SENSE
49	SENSE
50	SENSE
51	SENSE
52	SENSE
53	SENSE
54	SENSE
55	SENSE
56	SENSE
57	SENSE
58	SENSE
59	SENSE
60	SENSE


CTP PIN TABLE

1	2	3	4	5	6
VDD	RISSET	INT	SDA	SCL	GND

LED Specification:

ITEM	MIN	TP7	MAX	Condition
Forward Voltage VF	-	24.5V	27.5V	Find current: 10mA, 10min

Circuit Diagram(LED SMT 32 EA)



Color:	16.7M	Operating voltage	VDD=3.3V		
Interface:	TP7-LVDS/TP-12C	Operating Temp	-20°C TO 60°C		
Display type:	Transmissive	Storage Temp	-40°C TO 85°C	Yes Optoelectronics Co., Ltd.	
Viewing Direction:	ALL	Resolution	1280X819(RGB)X800	UNMARKED TOLERANCE ±0.2	
Drive IC	TP7-F75626(2 Points)	Luminance	800cd/m²	Size: A4	Draw
				Unit: mm	Chk
				Scale: Free	App